

LINEA LINE	PLUG-IN	SICUR FOOD CONTROL - SFC	4.0
TIPOLOGIA TYPE			







CARATTERISTICHE GENERALI

GENERAL FEATURES


MODELLO MODEL	BRUNO 100 Kg	ILARIO 150 Kg	AUGUSTO 200 Kg	
CODICE CODE	MATC100TC	MATC150TC	MATC200TC	
COLORE COLOR	ACCIAIO INOX AISI 304 STAINLESS STEEL AISI 304		LAMIERA PLASTIFICATA – ROSSO PLASTICIZED IRON SHEET – RED	
	LAMIERA PLASTIFICATA – NERA PLASTICIZED IRON SHEET – BLACK		LAMIERA PLASTIFICATA – CELESTE PLASTICIZED IRON SHEET – BLUE	
	VERNICIATO CON RAL (SU RICHIESTA) PAINTED WITH RAL (ON REQUEST)			

CONDIZIONI GENERALI E BUONE PRATICHE	GENERAL CONDITIONS AND BEST PRACTICES
<ul style="list-style-type: none"> • Non usare prodotti per l'igiene a base di cloro, sali di ammonio quaternario e derivati. • Garantire uno spazio di 40 - 50 cm sopra l'unità condensatrice. • Garantire la corretta sostituzione del filtro addolcitore come indicato nel <i>Manuale d'uso</i>. • Predisposizione per carico acqua diretto da rete. Fornito con tanica da 5L. • Predisposizione per scarico diretto. Fornito con vaschetta raccogli condensa. 	<ul style="list-style-type: none"> • Do not use hygiene products based on chlorine, quaternary ammonium salts and derivatives. • Ensure a space of 40 - 50 cm above the refrigeration unit. • Ensure the correct replacement of the softener filter as indicated in the User Manual. • Set up for direct water line Supplied with 5L tank • Set up for direct water discharge. Supplied with condensate drain tray.

RENDERING

MODELLO <i>MODEL</i>	BRUNO 100 Kg
CODICE <i>CODE</i>	MATC100TC
	
MODELLO <i>MODEL</i>	ILARIO 150 Kg
CODICE <i>CODE</i>	MATC150TC
	
MODELLO <i>MODEL</i>	AUGUSTO 200 Kg
CODICE <i>CODE</i>	MATC200TC
	

CARATTERISTICHE STRUTTURALI STRUCTURAL FEATURES

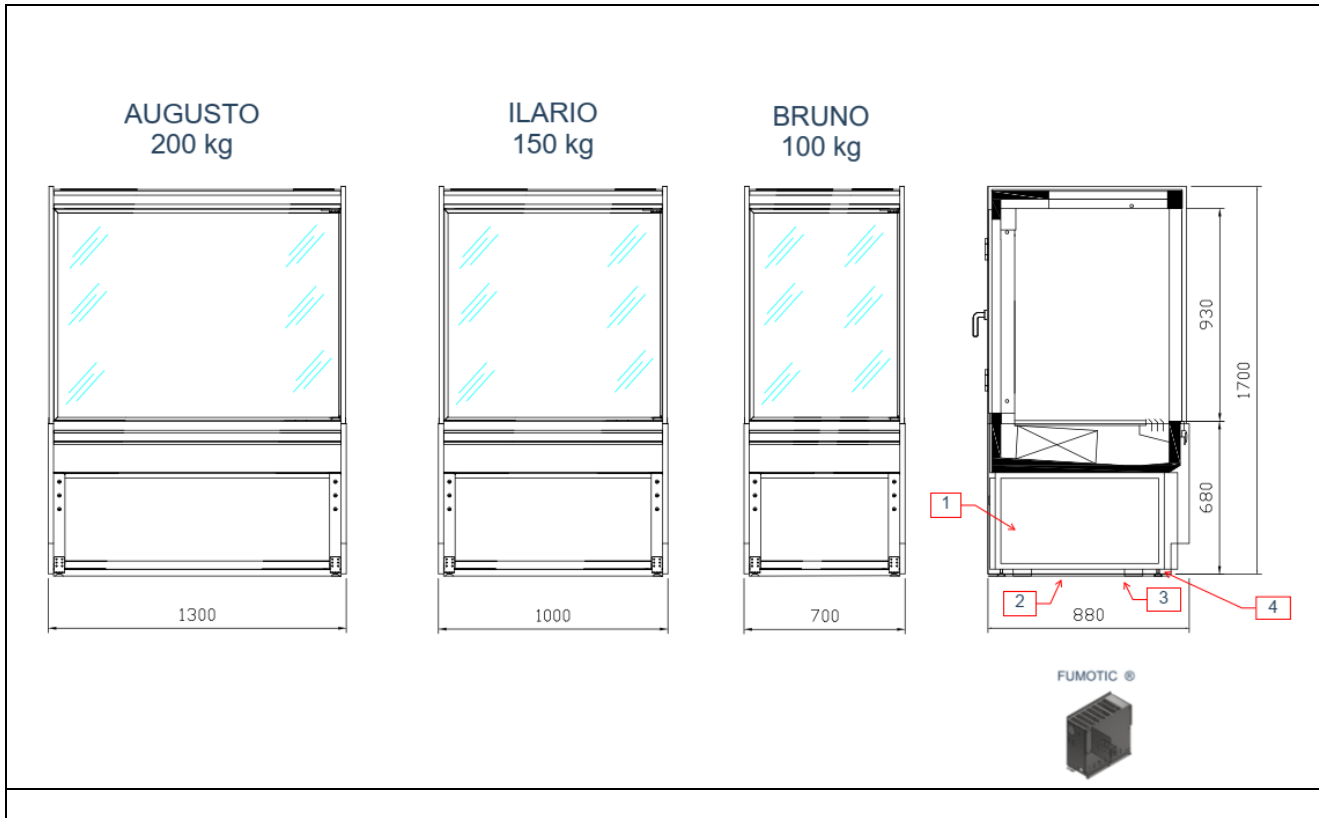

#	DESCRIZIONE / DESCRIPTION	SPECIFICA / FEATURES
1	Ingresso acqua diretto/ Direct Water inlet	Ø3/4"
2	Connessione elettrica / Electrical connection	220 – 240 V/1/ 50Hz ; 220 – 240 V/1/ 60Hz
3	Scarico acqua diretto/ Direct Water outlet	Ø 55mm
4	Piedini – feet	4 pz – 60 (H) mm

PESO TOTALE SENZA IMBALLO TOTAL WEIGHT WITHOUT PACKAGING		KIT TIPOLOGICO TYPOLOGICAL KIT	
BRUNO 100 Kg MATC100TC	Kg	KIT GUIDE STAINLESS STEEL AISI 304 GUIDE SETS	2 PZ + 2 PZ
ILARIO 150 Kg MATC150TC	Kg	GRIGLIA STAINLESS STEEL AISI 304 GRIDS	3 PZ
AUGUSTO 200 Kg MATC200TC	Kg		

**CARATTERISTICHE IMPIANTI
SYSTEMS FEATURES**

MODELLO MODEL	BRUNO 100 Kg	ILARIO 150 Kg	AUGUSTO 200 Kg
CODICE CODE	MATC100TC	MATC150TC	MATC200TC

ASSORBIMENTO MAX MAX POWER	1600 W – 7,3 A	2800 W – 12,8A	3500 W – 15,5A
ASSORBIMENTO NOMINALE RATED CURRENT	770 W – 3,5 A	1100 W – 5,2 A	1300 W – 6,0A
ILLUMINAZIONE LIGHTING	44 W - 0,2 A	44 W - 0,2 A	44 W - 0,2 A
TIPO REFRIGERANTE REFRIGERANT TYPE	R452A	R452A	R452A
TENSIONE – FREQUENZA – QUANTITA' GAS TENSION – FREQUENCY – GAS QUANTITY	220 – 240 V/1/50Hz 720g	220 – 240 V/1/50Hz 880g	220 – 240 V/1/50Hz 880g
CLASSE CLIMATICA CLIMATE CLASS	SN	SN	SN
RLA (rated load amps)	19,5 A	26,0 A	72, A

CONDIZIONI CLIMATICHE CLIMATE CONDITIONS		GAS COMPATIBILI (NON INCLUSO) GAS COMPATIBILITY (NOT PROVIDED)
TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURES	10 ÷ 25 °C	<ul style="list-style-type: none"> • R404A – 220-240V/1/50-60Hz • R449A – 220-240V/1/50-60Hz
UMIDITA' RELATIVA AMBIENTE RELATIVE HUMIDITY	60% RH	

**L'installazione finale viene eseguita solo da professionisti autorizzati dall'azienda produttrice.
Final installation must to be performed by technicians authorized from manufacturing company.**